



## SUPERIOR IN-LINE FILTRATION PROTECTION FOR LOW FLOW RATES


The Facet 1MCM Series single-element filter housing provides excellent filtration when used with any M Series single-length cartridge. This housing is designed for applications where space may be limited. The V-Band closure allows easy maintenance. To remove the cartridge, a clearance of  $25\frac{5}{16}$ " (643 mm) is required.

## STANDARD HOUSING DESIGN

- Body: Carbon steel
- Designed for 150 psi (10.5kg/cm<sup>2</sup>) @ 250°F (121°C)
- Closure: Stainless steel v-band
- Closure seal: Buna-N o-ring—other material available on request
- Exterior: Shop primer
- Inlet and outlet connections: 1½" NPT
- Vent and drain connections: ¼" NPT

## OPTIONS

- Internal epoxy coating

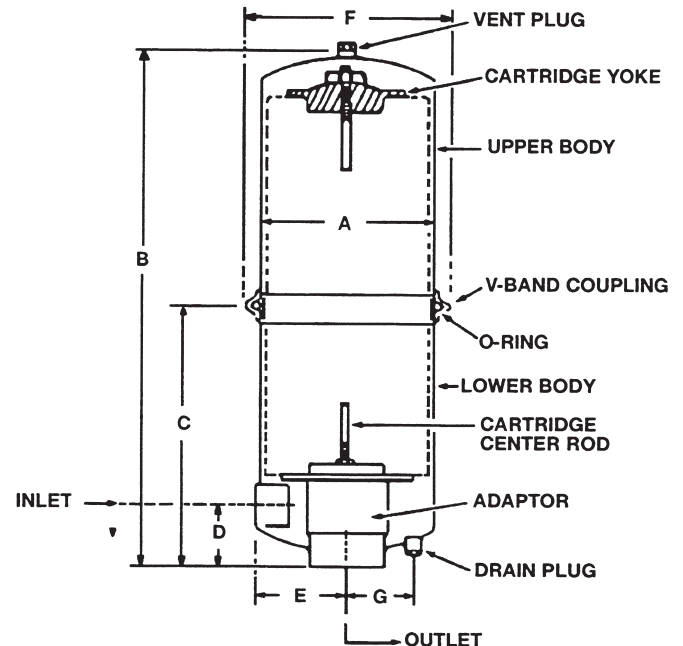

## DATA

HOUSING MODEL NUMBER	HOUSING WEIGHT		HOUSING LIQUID VOLUME	
	lbs.	kgs	gal.	ltr.
1MCM	22	10	2.7	10.2

Weights and volumes are approximate.

## DIMENSIONS

A		B		C		D		E		F		G	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
6 <sup>5</sup> / <sub>8</sub>	168	21 <sup>1</sup> / <sub>16</sub>	548	10 <sup>3</sup> / <sub>4</sub>	273	2 <sup>5</sup> / <sub>8</sub>	67	3 <sup>3</sup> / <sub>8</sub>	86	7 <sup>1</sup> / <sub>4</sub>	184	2 <sup>3</sup> / <sub>8</sub>	60

All dimensions are for estimating purposes only.

*Due to our continuing program of improvement, specifications are subject to change without notice.*