

V Series



DESIGN AND CONSTRUCTION

Facet Lube Oil Conditioners are built in carbon steel, epoxy painted and designed according to ASME VIII-I.

This equipment is specially designed to remove solids such as dirt, rust, sand and metallic particles wear, as well as lube oily water.

The equipments is made up by a separator filter, a pumping unit and heating unit (optional), all assembled in a skid.

The microfilter separator includes coalescer and separator cartridges with a double objective of retaining the finest particles and removal of water, to ensure a long life and high effectiveness thanks to their specific properties.

CARACTERISTICS

The equipment has the following elements:

- Microfilter separator
- Pumping unit
- Heating (optional)
- Differential pressure gauge
- Level water gauge
- Automatic air eliminator
- Level prove to detect the presence of water
- Control panel

The control panel has the following visual alarms: high level of water in the microfilter separator, high differential pressure, general failure, high temperature alarm (optional)

RESULTS

Removes, in continues operation, solids and free water up to concentrations below 20 ppm.


Automatic operation, controlled by a PLC.

No flow inlet adjustment is required.

Its design ensures a safe service and free of leaks or discharges.

Their features make this equipment to have a low maintenance and to be easy to operate.

Each equipment is tested before its shipment to ensure optimum start-up and highest service rates.

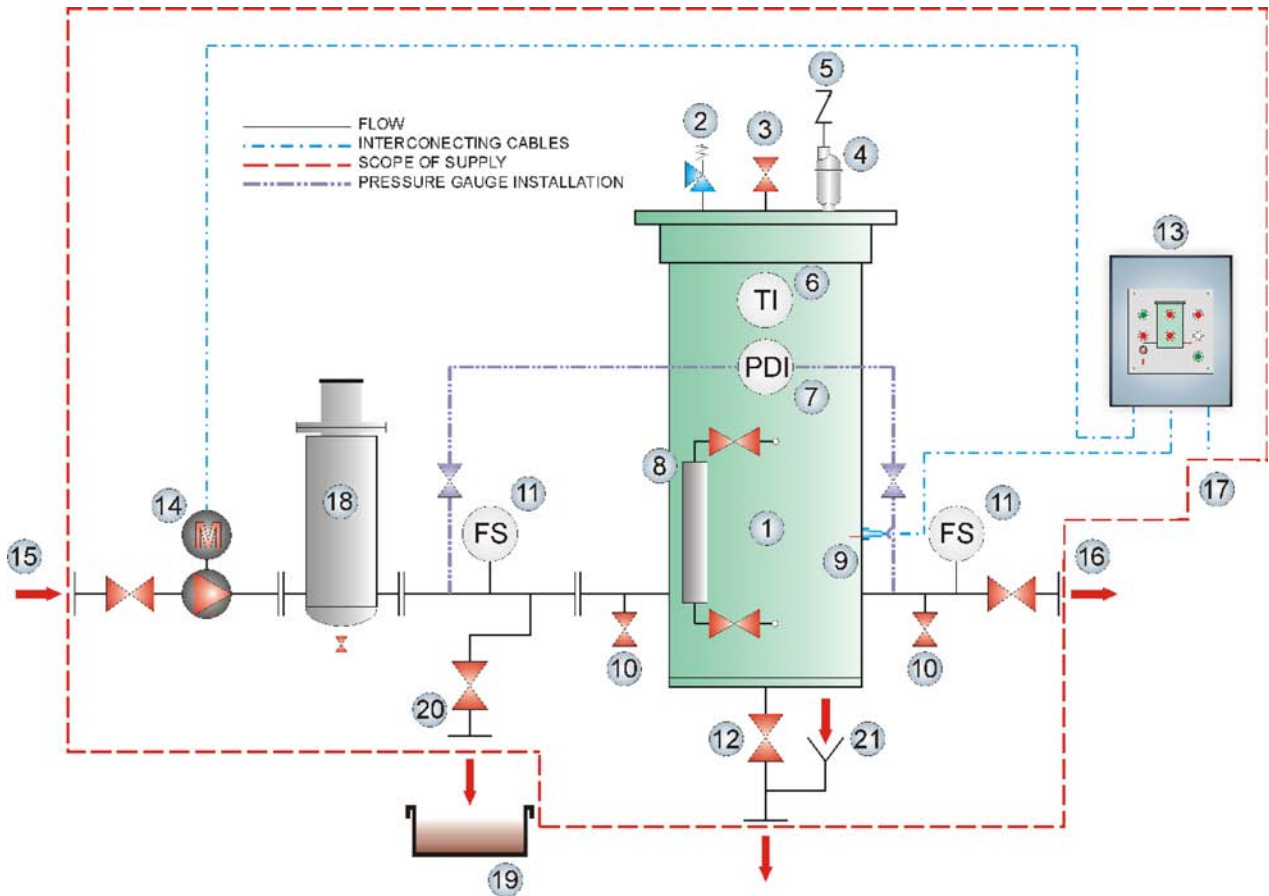

ITEM	DESCRIPTION
1	VCS microfilter separator
2	Relief valve
3	Manual vent
4	Air eliminator
5	Check valve
6	Temperature Indicator
7	Differential pressure gauge
8	Level indicator
9	Level probe
10	Inlet/Outlet sample probe
11	Flow switch
12	Manual drain valve
13	Control panel
14	Motor pump
15	Inlet
16	Outlet
17	Power supply (by others)
18	Heater (optional)
19	Tank (by others)
20	Return to tank line
21	Drain

MODEL	V40	V70
Coalescer Cartridge	CA56-3	CA43-3
No. of Cartridges	2	3
Recommended spares	2	3
Separator Cartridges	ST640FD	ST636FD
No. of Cartridge	1	2
Recommended spares	1	2

MODEL	FLOW RATE		DIMENSIONS (mm)			CONNECTIONS			
	gpm	lpm	Length	Width	Height	Inlet	Outlet	Return to Tank	Manual Drain
V40	10.5	40	1350	950	2390	DN-40	DN-40	DN-40	DN-25
V70	18.5	70	1350	950	2055	DN-40	DN-40	DN-40	DN-25