



## Series 21 & 22 for pump & engines protection

FACET filter water separator model VFCS-21/22-C, body built in carbon steel and protected with epoxy coating, cap in anodized die cast aluminium. Suitable for removing water from diesel down to 25 p.p.m., as well as solids bigger than 25 micra in a flow rate up to 4000 l/h of diesel oil.

With high vacuum alarm feature for pump engines protection.


- Manual drain valve.
- Aeration valve.
- Decantation sump with sight glass.
- FACET coalescer/separator cartridge.

### OPTION

Comprising the following main elements:

- Vacuum meter with switch feature.
- Panel with high vacuum alarm.

- Automatic by-pass valve.

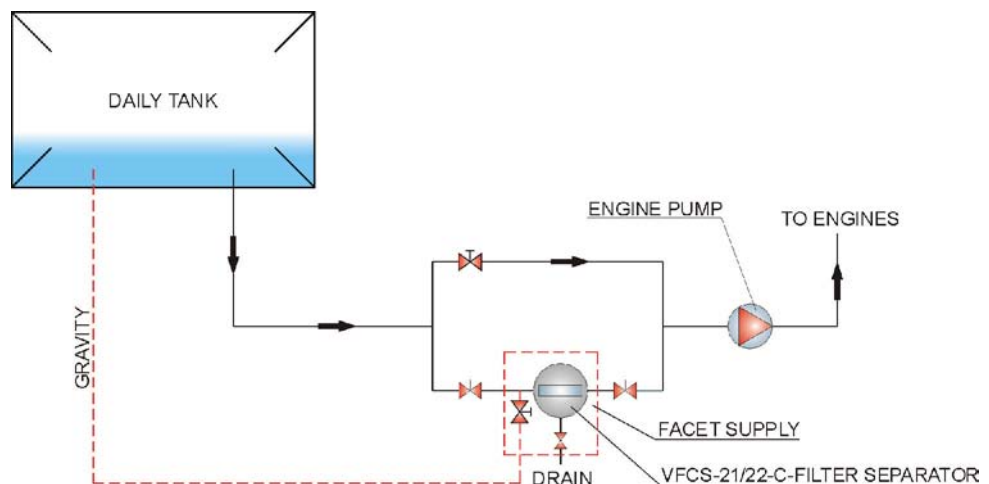

MODEL	DIMENSIONS (mm)			FLOW RATE (up to)		WEIGHT (kg)	CONNECTIONS	
	a	b	c	lph	gpm		Inlet / Outlet	Drain
VFCS-21-C	510	250	350	5220	1380	12	1" F.	3/8" F.
VFCS-22-C	615	250	350	6840	1805	13.5	1" F.	3/8" F.